

EXPLOSION PROOF CCTV

Explosion Proof CCTV Equipment




ZAJS400 Explosion Proof Monitor



PT. BERSAUDARA MANDIRI REJEKI


Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201 WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com
<https://www.bersaudaramandiri.co.id>

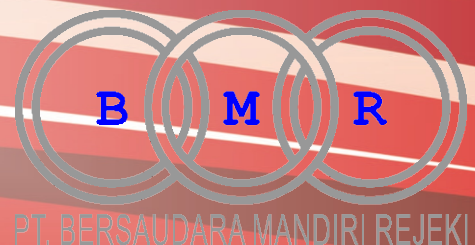

ZAJS400

Explosion Proof CCTV Equipment

Explosion Proof Monitor

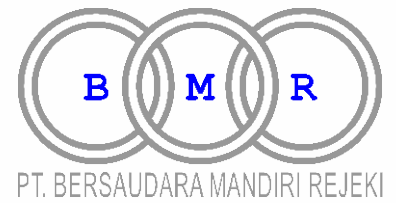

Description :

Dengan Sertifikasi yang ketat, Explosion proof Monitor ZAJS400 dirancang untuk digunakan dalam area berbahaya kimia, fasilitas gas dan oli, pabrik pengolahan makanan, dan area berbahaya lainnya, untuk mencegah kerusakan pada peralatan didalamnya dengan menahan panas, percikan api atau api yang dihasilkan, serta suhu yang panas dari luar housing.

Material SS 316L dapat digunakan untuk marine seperti kapal laut, rig offshore, dan industri maritim lainnya.

Working Environmental Condition :

- Working Voltage : AC100-240V
- Working Electric Current : $\leq 1000\text{mA}$
- Environment temperature : $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Average relative humidity : $\leq 95\%$
- Atmospheric Pressure : $80\text{kPa} \sim 106\text{kPa}$
- Apply to explosive gas atmosphere 1 district / 2 district dangerous ground
- Apply to IIA, IIB, IIC grade explosive gas atmosphere
- Apply to flammability dust environment 20/21/22 district
- Apply to the environment of temperature group T1-T6

Features :

- CNEEx, CE, Approved
- Applicable for Gas Zone 1, Zone 2, (Class IIA, IIB, IIC, T1-T6 group) Dust Zone 21, 22.
- Stainless steel 304 or 316L enclosure
- Surface optional electro-polished or painting
- Weather Proof IP68 (1.2m/45min)
- Wide voltage input: AC100-240V
- Strong tempered glass, fit for hydrofluoric acid area
- Intelligent window defroster design
- Auto temperature adjust kit for aggressive area
- Auto temperature adjust kit for aggressive area
- Symmetrical balancing design
- 15-17inch display



SPECIFICATION

Certificate

Certificate Mark	Ex d IIB T6 Gb / Ex tD A21 IP68 T80°C Db
Certificate No	CNEx19.0326
Standards	Q/320412ZAF014-2018

Mechanical

Housing	Stainless steel 304 or 316L
IP	IP68
Cable thread hole	1pcs G3/4 or NPT3/4

Electrical

Voltage	AC100-240V <3A
Power	50W
Surge Protect	Optional, TVS6000V surge protect

Ambient

Ambient temperature	-40 to +60°C
Air pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)

Function


Dot Pitch	0.24825mm*0.24825mm
Resolution	1920*1080P
Brightness	300cd/m ²
Contrast	1000:01:00
Response Time	14ms (G. To G)



ZAJS400

Explosion Proof CCTV Equipment

Explosion Proof Monitor

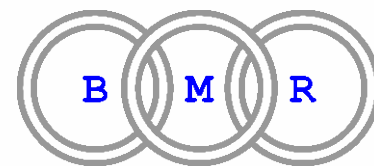

PT. BERSAUDARA MANDIRI REJEKI


Color	16.7M
Line Frequency	31.5-60KHz
Field Frequency	56-75Hz, Flick-free
View Degree	Horizontal 176°
Connector Port	VGA,or BNC, S-VHS, RGB, CVBS

General

Cable	integrated cable
Size	473*200*396mm
Weight	28kg
Mounted	desk



DIMENSION

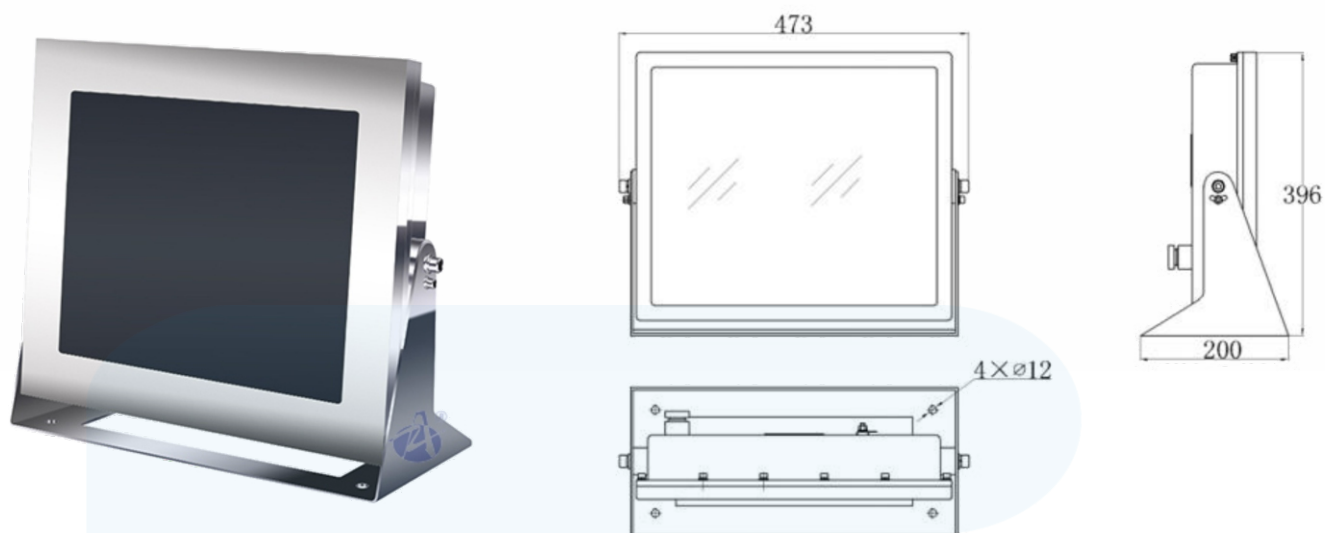

FNR
GRUP





CONTACT PERSON



PT. BERSAUDARA MANDIRI REJEKI



Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201
WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com



国家防爆

