

EXPLOSION PROOF CCTV

Explosion Proof CCTV Equipment




ZAPL

Explosion Proof Washing Tank



PT. BERSAUDARA MANDIRI REJEKI

Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201 WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com
<https://www.bersaudaramandiri.co.id>

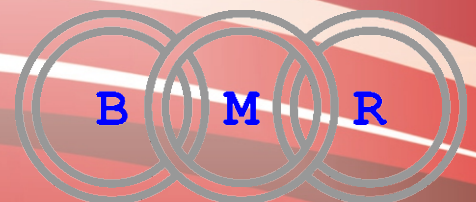

PT. BERSAUDARA MANDIRI REJEKI



Description :

Dengan Sertifikasi yang ketat dari ATEX, Explosion proof Washing Tank System ZAPL 10 dirancang sebagai tank cadangan tambahan untuk wiper system pada Zuoan Explosion Proof CCTV Camera seperti pada CNEx Certified type ZAT660, ZAT670, ZAT680, dan ZAF100A, serta pada ATEX Certified Type CZ610 Series, CZ1035, dan CZ100A.

Material SS 316L dapat digunakan untuk marine seperti kapal laut, rig offshore, dan industri maritim lainnya.

Working Environmental Condition :

- Working Voltage : AC100-240V
- Working Electric Current : $\leq 1000\text{mA}$
- Environment temperature : $-40^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- Average relative humidity : $\leq 95\%$
- Atmospheric Pressure : $80\text{kPa} \sim 106\text{kPa}$
- Apply to explosive gas atmosphere 1 district / 2 district dangerous ground
- Apply to IIA, IIB, IIC grade explosive gas atmosphere
- Apply to flammability dust environment 20/21/22 district
- Apply to the environment of temperature group T1-T6

Features :

- ATEX, IECEx, CNEx, CE, Approved
- Applicable for Gas Zone 1, Zone 2, (Class IIA, IIB, IIC, T1-T6 group) Dust Zone 21, 22.
- Stainless steel 304 or 316L enclosure
- Surface optional electro-polished or painting
- Weather Proof Ip68 (1.2m/45min)
- Wide voltage input: AC100-240V or AC24V
- Strong tempered glass, fit for hydrofluoric acid area
- Intelligent window defroster design
- Auto temperature adjust kit for aggressive area
- Auto temperature adjust kit for aggressive area
- Symmetrical balancing design
- Intelligent long focal speed limit, fit for long distance monitoring



Certificate

Certificate Mark	CE 2460 Ex II 2 G Ex db op is IIC T6 Gb
------------------	---

Mechanical

Housing	Stainless steel 304 or 316L Crust
IP	IP68
Cable thread hole	2pcs G3/4 or NPT3/4 or M25*1.5

Electrical

Voltage	AC24V or DC24V or AC220V
Apparent Power	30VA@24V1.25A

Tank

Water Tank	10 L
Water	windshield washer fluid
Water Spray Form	Atomizing
Clean Agent	Windshield washer fluid
Valve pressure	0-63 Bar



Communication


Baud Rate	9600
Protocol	Pelco-D
Address	3
Control Way	Rs485, by preset

General

Dimension	400.4*236*716 mm
Weight	17.5kg without water
Mounted way	Wall, Pole mounted



Dimension

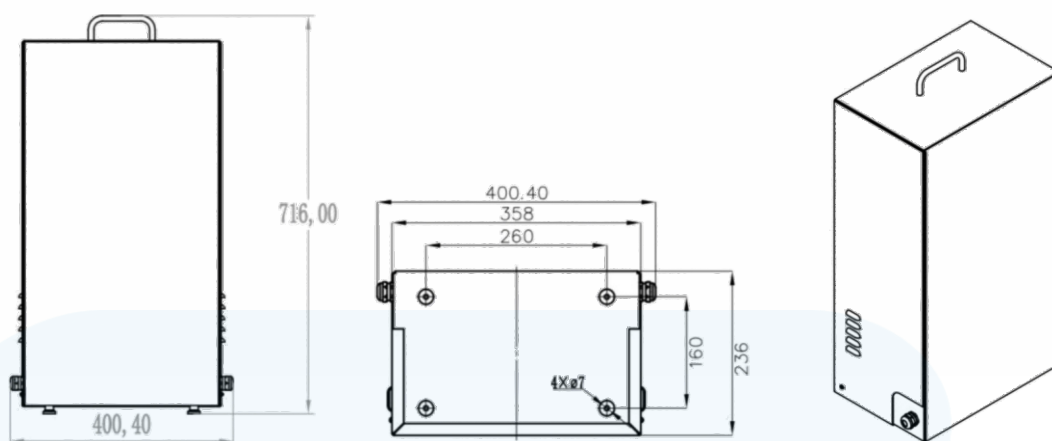

Relative Product





CONTACT PERSON



PT. BERSAUDARA MANDIRI REJEKI



Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201
WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com

