

EXPLOSION PROOF CCTV

Explosion Proof CCTV Equipment




ZAY210

Explosion Proof Pan Tilt



PT. BERSAUDARA MANDIRI REJEKI


Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201 WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com
<https://www.bersaudaramandiri.co.id>

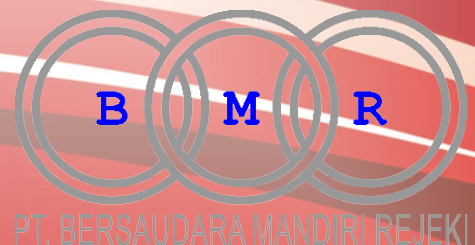

ZAY210

Explosion Proof CCTV Equipment

Explosion Proof Pan Tilt

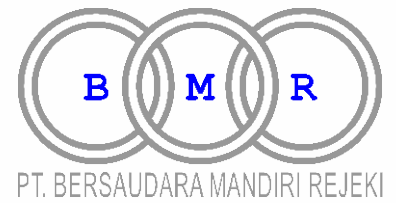

Description :

Dengan Sertifikasi yang ketat, Explosion proof Pan Tilt ZAY210 dirancang untuk dirancang sebagai tambahan pada Zuoan Explosion Proof CCTV Fixed Camera seperti pada type CNEx ZAF100 Series, ZAF1031, ZAF1032 Series, ZAF105, dan ATEX Type CZ100 Series.

Material SS 316L dapat digunakan untuk marine seperti kapal laut, rig offshore, dan industri maritim lainnya.

Working Environmental Condition :

- Working Voltage : AC100-240V
- Working Electric Current : $\leq 1000\text{mA}$
- Environment temperature : $-40^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- Average relative humidity : $\leq 95\%$
- Atmospheric Pressure : $80\text{kPa} \sim 106\text{kPa}$
- Apply to explosive gas atmosphere 1 district / 2 district dangerous ground
- Apply to IIA, IIB, IIC grade explosive gas atmosphere
- Apply to flammability dust environment 20/21/22 district
- Apply to the environment of temperature group T1-T6

Features :

- CNEx, CE, Approved
- Applicable for Gas Zone 1, Zone 2, (Class IIA, IIB, IIC, T1-T6 group) Dust Zone 21, 22.
- Stainless steel 304 or 316L enclosure
- Surface optional electro-polished or painting
- Weather Proof Ip68 (1.2m/45min)
- Wide voltage input: AC100-240V or AC24V
- Strong tempered glass, fit for hydrofluoric acid area
- Intelligent window defroster design
- Auto temperature adjust kit for aggressive area
- Auto temperature adjust kit for aggressive area
- Symmetrical balancing design
- Intelligent long focal speed limit, fit for long distance monitoring



Certificate

Certificate Mark	Ex d IIC T6 Gb/Ex tD A21 IP68 T80°C
Certificate No	CNEx19.1373X
Standards	Q/320412ZAF012-2019

Mechanical

Housing	Stainless steel 304 or 316L
IP	IP68
Cable thread hole	2pcs G3/4 or NPT3/4 or M25*1.5

Electrical

Voltage	AC220V or AC24V
Power	50W

Ambient

Ambient temperature	-25 to +60°C
Air pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)



Communication

Communication	support analog video output
485 Communication	Support Pelco-D, Pelco-P
Communicate Rate	2400 to 19200bps

Pan & Tilt

Horizontal	360°
Horizontal speed	0.1-45°/s
Vertical	-90 to +80°


General

Cable	integrated cable
Size	315*178*259mm
Weight	15 kg
Mounted	wall, pole



国家防爆

Dimension

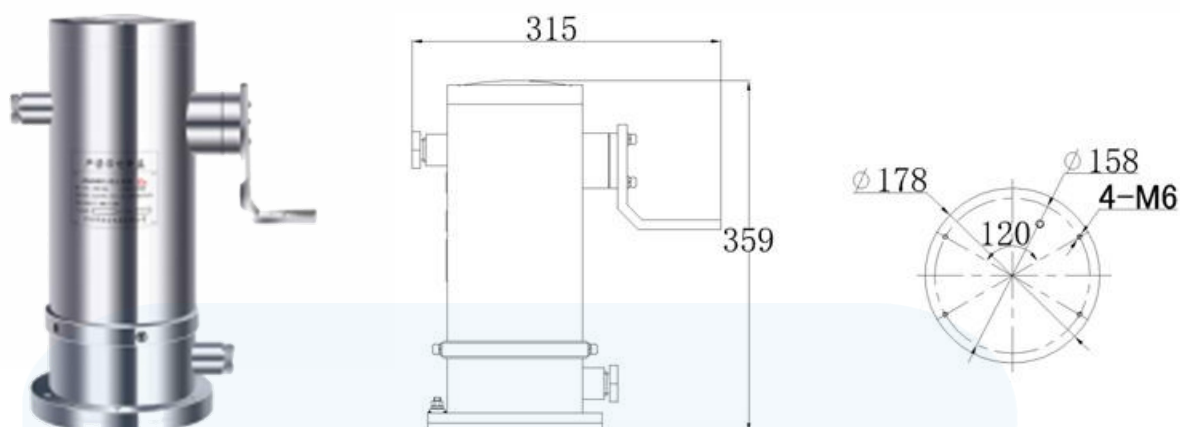

Relative Product



ZAZ210B




ZANXG



ZAEX02



ZA-JXD4Ex Junction box



CZ300 Ex Control Box





CONTACT PERSON



PT. BERSAUDARA MANDIRI REJEKI



Jl. Cisaranten Baru No.57, Cisaranten Kulon
Arcamanik Kota Bandung, 40293
Telp : (022) 63745201
WhatsApp : 0812-2220-6505
Email : sales@fnrgrup.com

